
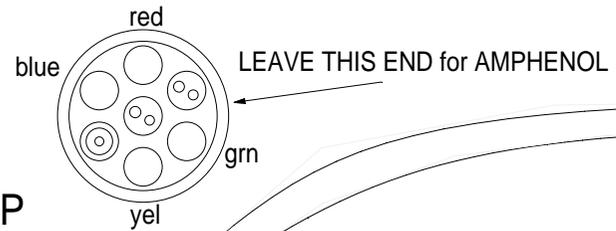
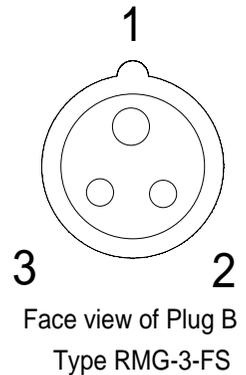



NOTES:

1. Measurements taken to face, not pins.
2. Length of cable will be specified with each order.
3. Pin numbers may be marked on face of connectors.
4. If RMG cable is less than 500mm, maintain difference between tails.

Note: Fit RMG locking ring before moulding

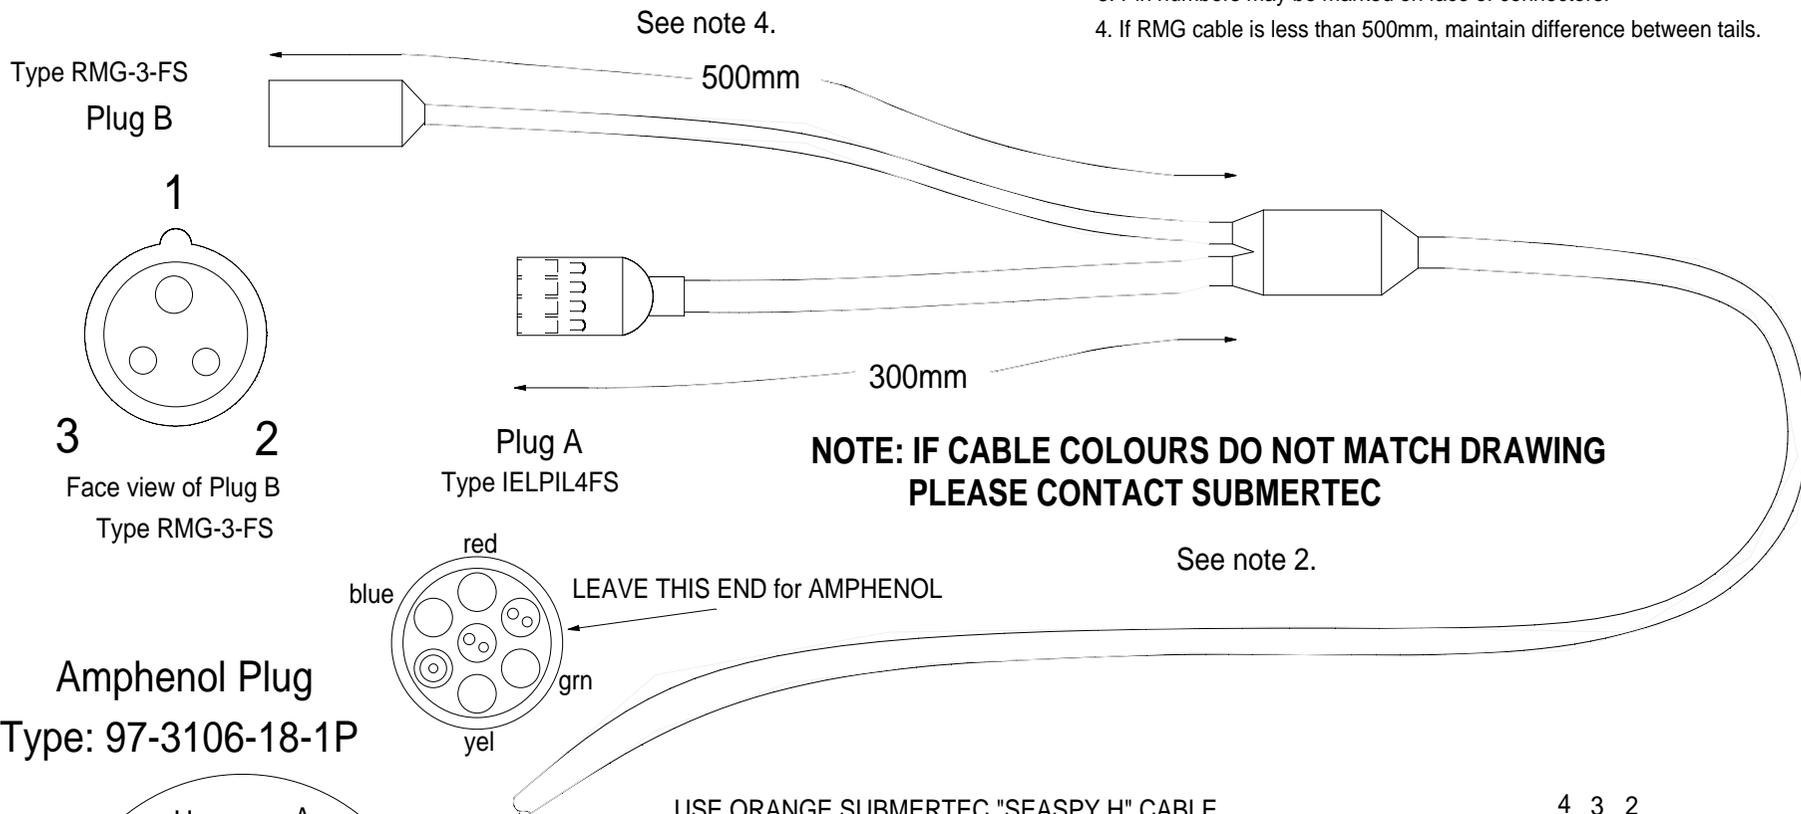


Amphenol Plug
Type: 97-3106-18-1P

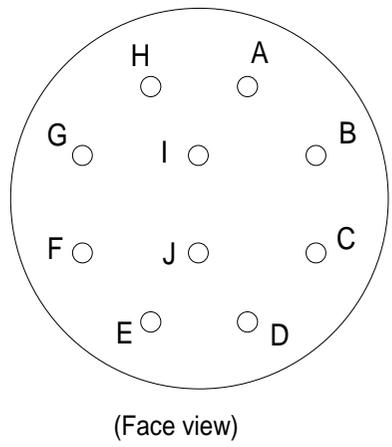

USE ORANGE SUBMERTEC "SEASPY H" CABLE

CABLE	PIN CONNECTIONS			FUNCTION
	Plug A	Plug B	Amphenol	
Conductor				
Coax inner	2		D	Video
Coax outer	1		A	0v
0.50 TP red	3		B	Cam +ve
0.50 TP blue	4		C	Focus / Balanced
0.5 TP screen	1		A	0v
1.5mm blue		2	F	Lamp return
1.5mm green		2	J	Lamp return
1.5mm red		3	G	Lamp power
1.5mm yellow		3	I	Lamp power
0.38 TP screen		1	H	Lamp Ground
0.38 STP red				N.C
0.38 STP green				N.C



Face view of Plug A
Type IELPIL4FS

FOR 24 or 120 VOLT VIDEOLIGHT

SUBMERTEC LIMITED.

TITLE: Seaspy B, C & D cable detail	
DRWG No: CABLE4F	DATE: 31-03-04
DRAWN BY: PCS	SCALE: DO NOT SCALE
DIMENSIONS: N/A	

The copyright for this work is vested in Submertec Limited. This document is issued in confidence for the purpose only for which it was supplied. It must not be reproduced in whole or in part or used for rendering or manufacturing purposes except under agreement or with the consent in writing of Submertec Limited and then only on the condition that this notice is included in any such reproduction.